


POSITIONING

- **Select a Mounting Location**

Choose a suitable location in your vehicle to install the subwoofer.
A recommended position is under the vehicle seat, as shown below.

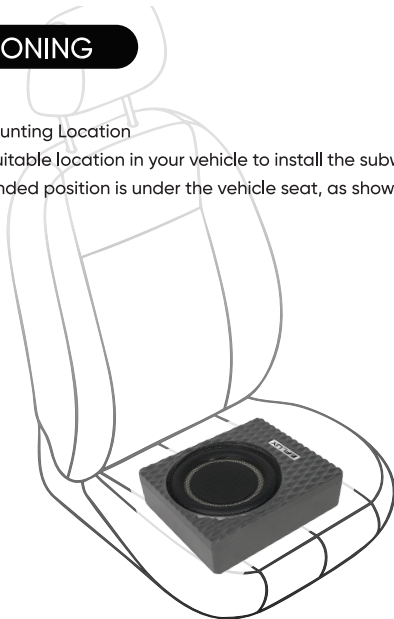

- **Ensure Proper Ventilation**

Verify that there is sufficient air circulation around the installation area to prevent overheating and ensure optimal performance.

- **Safety Precautions**

Before drilling or inserting screws, carefully check to make sure you will not damage any fuel lines, brake lines, electrical wiring, or other components located beneath the surface.



COMPACT 6

6 INCH ENCLOSURE SUBWOOFER



DYNAMIC
BASS



EASY
INSTALL



ALUMINIUM
BODY

INSTALLATION MANUAL

CONGRATULATION

You already bought one of the best FLUX German Car Hifi Component loudspeaker System. Thanks you for deciding to purchase our product. These speaker Systems drivers design to achieve a powerful, high-quality sound, you will get the maximum listening pleasure and ultimate sound reproduction you ever hear.

WARNING

• ATTENTION

Please read all the warnings that can be found in this manual. You can install all components in your vehicle and experience an ultimate step by step car audio installation procedure with proper mechanical and electrical installations.

• HEARING DAMAGE

Continuous, excessive exposure to sound pressure levels in excess of 85dB can cause a loss of hearing. FLUX Components are capable of producing sound pressure levels greater than 85dB.

• VOLUME AND DRIVER AWARENESS

Use of sound components can impair your ability to hear necessary traffic sound and may constitute a hazard while driving your vehicle. FLUX except no liability for hearing loss boardly injury or property damage as result of use or missused of this product.

COMPACT-6 PRODUCT FEATURE

Driver Type	Subwoofer
Subwoofer Size	6 Inch
Dustcap Material	Aluminium
Chasis Material	Aluminium Die Cast
Power Rated	100 W
Freq. Response	50Hz~150KHz
Dimension	220 x 190 x 76 mm

COMPACT 6
6 INCH ENCLOSURE SUBWOOFER